



TBP Converting, Inc.  
Sikaflex 295UV PDS

## PRODUCT DATA SHEET

# Sikaflex®-295 UV

Exterior sealant and direct glazing adhesive for organic glass in Marine applications

**TYPICAL PRODUCT DATA (FURTHER VALUES SEE SAFETY DATA SHEET)**

<b>Chemical base</b>	1-component polyurethane
<b>Color (CQP001-1)</b>	Black, white
<b>Cure mechanism</b>	Moisture-curing
<b>Density (uncured)</b>	1.3 kg/l (10.8 lb/gal)
<b>Non-sag properties</b>	Good
<b>Application temperature</b>	10 – 35 °C (50 – 95 °F)
<b>Skin time (CQP019-1)</b>	60 minutes <sup>A</sup>
<b>Open time (CQP526-1)</b>	45 minutes <sup>A</sup>
<b>Curing speed (CQP049-1)</b>	(see diagram 1)
<b>Shrinkage (CQP014-1)</b>	1 %
<b>Shore A hardness (CQP023-1 / ISO 48-4)</b>	35
<b>Tensile strength (CQP036-1 / ISO 527)</b>	2 MPa (290 psi)
<b>Elongation at break (CQP036-1 / ISO 527)</b>	500 %
<b>Tear propagation resistance (CQP045-1 / ISO 34)</b>	5 N/mm (30 pli)
<b>Service temperature (CQP509-1 / CQP513-1)</b>	-50 – 90 °C (-58 – 194 °F)
<b>Shelf life (CQP016-1)</b>	12 months <sup>B</sup>

CQP = Corporate Quality Procedure

<sup>A</sup>) 23 °C (73 °F) / 50 % r. h.<sup>B</sup>) storage below 25 °C (77 °F)**DESCRIPTION**

Sikaflex®-295 UV is a 1-component polyurethane adhesive of paste-like consistency that cures on exposure to atmospheric moisture. It is suitable for interior and exterior sealing applications and to bond organic glass in the Marine business.

Sikaflex®-295 UV meets the requirements set out by the International Maritime Organization (IMO).

**PRODUCT BENEFITS**

- Excellent application properties
- Resistant to aging and weathering
- Suitable for organic glasses
- Approved for the OEM market
- Wheelmark approved

**AREAS OF APPLICATION**

Sikaflex®-295 UV has been specially developed for the marine industry, where it is used to bond and seal plastic glazing materials in boats and ships. Because of its excellent weatherability this product can also be used to seal joints in exposed areas.

Suitable substrates are aluminium (bright or anodized), GRP (polyester resin), stainless steel, timber, 2-component coatings and plastic glazing materials (PC, PMMA).

Seek manufacturer's advice and perform tests on original substrates before using Sikaflex®-295 UV on materials prone to stress cracking. This product is suitable for experienced professional users only. Test with actual substrates and conditions have to be performed to ensure adhesion and material compatibility.

**PRODUCT DATA SHEET**

Sikaflex®-295 UV

Version 02.01 (04 - 2022), en\_US

012001212954001000

## CURE MECHANISM

Sikaflex®-295 UV cures by reaction with atmospheric moisture. At low temperatures the water content of the air is generally lower and the curing reaction proceeds somewhat slower (see diagram 1).

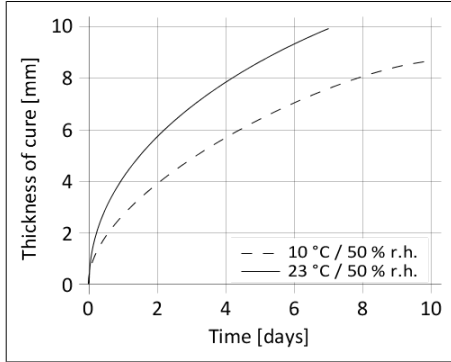


Diagram 1: Curing speed Sikaflex®-295 UV

## CHEMICAL RESISTANCE

Sikaflex®-295 UV is generally resistant to fresh water, seawater, diluted acids and diluted caustic solutions; temporarily resistant to fuels, mineral oils, vegetable and animal fats and oils; not resistant to organic acids, glycolic alcohol, concentrated mineral acids and caustic solutions or solvents.

## METHOD OF APPLICATION

### Surface Preparation

Surfaces must be clean, dry and free from grease, oil, dust and contaminants. Surface treatment depends on the specific nature of the substrates and is crucial for a long lasting bond. Suggestions for surface preparation may be found on the current edition of the appropriate Sika® Pre-treatment Chart. Consider that these suggestions are based on experience and have in any case to be verified by tests on original substrates.

### Application

Sikaflex®-295 UV can be processed at temperatures (climate and product) between 10 °C and 35 °C (50 °C and 95 °F) but changes in reactivity and application properties have to be considered. The optimum temperature for substrate and sealant is between 15 °C and 25 °C (59 °F and 77 °F).

Consider that the viscosity will increase at low temperature. For easy application, condition the adhesive at ambient temperature prior to use. To ensure a uniform thickness of the bondline it is recommended to apply the adhesive in form of a triangular bead (see figure 1).

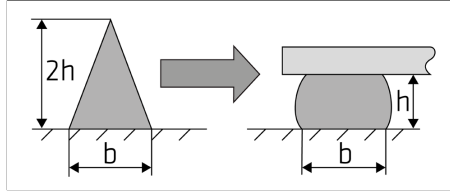


Figure 1: Recommended bead configuration

Sikaflex®-295 UV can be processed with manual, pneumatic or electric driven piston guns. The open time is significantly shorter in hot and humid climate. The parts must always be installed within the open time. Never join bonding parts if the adhesive has built a skin.

## Tooling and finishing

Tooling and finishing must be carried out within the skin time of the product. It is recommended using Sika® Slick. Other finishing agents must be tested for suitability and compatibility prior to the use.

## Removal

Uncured Sikaflex®-295 UV can be removed from tools and equipment with Sika® Remover-208 or another suitable solvent. Once cured, the material can only be removed mechanically. Hands and exposed skin have to be washed immediately using a suitable industrial hand cleaner and water.

Do not use solvents on skin.

## Overpainting

Sikaflex®-295 UV can be painted prior and after formation of a skin. If painting process takes place after the sealant has built a skin, adhesion could be improved by treating the joint surface with Sika® Aktivator-100 or Sika® Aktivator-205 prior to paint process. If the paint requires a baking process (> 80 °C), best performance is achieved by allowing the sealant to fully cure first. All paints have to be tested by carrying preliminary trials under manufacturing conditions.

The elasticity of paints is usually lower than that of sealants. This could lead to cracking of the paint in the joint area.

## FURTHER INFORMATION

Copies of the following publications are available on request:

- Safety Data Sheets
- Sika Pre-treatment Chart  
For 1-component Polyurethanes
- General Guidelines  
Bonding and Sealing with 1-component Sikaflex®

## PACKAGING INFORMATION

Cartridge	300 ml
Tube	3 oz

## BASIS OF PRODUCT DATA

All technical data stated in this document are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## ENVIRONMENTAL, HEALTH AND SAFETY

For further information and advice regarding transportation, handling, storage and disposal of chemical products, user should refer to the actual Safety Data Sheets containing physical, environmental, toxicological and other safety related data. User must read the current actual Safety Data Sheets before using any products. In case of an emergency, call CHEMTREC at 1-800-424-9300, International 703-527-3887.

## LEGAL DISCLAIMER

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at [usa.sika.com](http://usa.sika.com) or by contacting SIKA's Technical Service Department via email at [tsmh@us.sika.com](mailto:tsmh@us.sika.com). Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.** Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling +1 800-933-7452.

## PRODUCT DATA SHEET

Sikaflex®-295 UV  
Version 02.01 (04 - 2022), en\_US  
012001212954001000

Sika Corporation  
30800 Stephenson Highway  
Madison Heights, MI 48071  
U.S.A.  
Telephone: +1 248-577-0020  
Email: [tsmh@us.sika.com](mailto:tsmh@us.sika.com)  
[www.sikausa.com](http://www.sikausa.com)

