


Surface protective materials

SPV-224PR-MJ

Outline

SPV-224PR-MJ is a PVC base surface protective tape that complies with RoHS2 regulations.
This product can be used outside due to their special pressure sensitive adhesive.

Construction

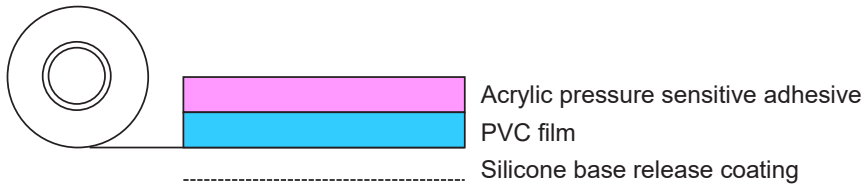

Features

- Special acrylic adhesive allows outdoor use.
- Suitable for processing of stainless steel plates, aluminum plates, nameplates, etc.

Applications

- Surface protection for stainlesssteel plates, aluminum plates and name plates during processing.
- Storage of glass, alminum sashes, etc.

SPV-224PR-MJ_E
1/3
2019.5.21

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

Nitto Denko Corporation

Standard Size • Color

Item	Thickness (mm)	Width (mm)	Length (M)	Color
SPV-224PR-MJ	0.075	1280	200	TP/LB

*Contact us for information concerning sizes.

General properties

Item	Unit	SPV-224PR-MJ
Thickness	mm	0.075
Adhesive Strength *1	cN/20mm	100
Unwinding Force *2	cN/20mm	20
Tensile Strength *3	N/20mm	65
Elongation *3	%	240
Weatherbility *4	-	Residue not allowed

Test Method

*1: Adherend SUS430BA, Tensile speed 0.3m/min, Peeling angle 180°, Dwell time 20-40 min.

*2: Tensile speed 0.3m/min

*3: Tensile speed 0.3m/min, Tensile strength and Elongation at breaking point

*4: Adherend SUS430BA, Tensile speed 0.3m/min, Peeling angle 180°, Residue not allowed after 750 hours in sunshine weather-o-meter chamber under 108 minutes light and 18 minutes spray condition.

SPV-224PR-MJ_E
2/3
2019.5.21

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

Nitto Denko Corporation

Precautions

- Duly inspect the adaptability of this product to your intended use, prior to its application.
We may conduct the adaptability test in your favor. However, its content and results do not guarantee your use. It is of your responsibility to ultimately determine its adaptability.
- The characteristics and performance of this product depends on the type of adherend, environment of use, and conditions/period after application. Always test (including the appearance) before changing the adherend (composition/surface roughness), conditions or use.
- When the product is applied to PVC adherends with plasticizer or surface-active adherends (electrolyzed, chemically treated, polished, etc.), it may become difficult to release or may tend to leave deposits, as time passes.
- When applying the product to a display material, test with particular attention on appearance defects. Stain, cloudiness or unevenness may appear on the surface of the display material, depending on its type. Traces of air bubbles may be left if they are trapped during application.
- Aforementioned problems may also arise when the product is stored for a long period of time after application.
- Aforementioned problems may also arise when the product is used outdoors for a long period of time. Fully check before use.
- Remove any grease, moisture or dust on the adherend before application.
- When coating after the surface protective material has been peeled, products should be used upon giving sufficient consideration to surface washing, below-surface processing and sintering conditions and confirming the adhesiveness of the coating.
- PVC type surface protective materials may cause gloss unevenness due to the coating or paint on the surface of the substrate. Prior to use it, enough consideration and care must be necessary.

SPV-224PR-MJ_E

3/3

2019.5.21

Notes: This data represents examples of measured values, and not guaranteed values. They do not guarantee compatibility with the applications described in these documents. Please confirm compatibility with your application prior to use. We retain all rights, including copyrights, for the contents of these documents. Copying, reprinting and use for purposes other than originally intended are strictly prohibited without our prior expressed permission. Contact details are provided at the end of this document. Please do not hesitate to contact us for any inquiry.

Nitto Denko Corporation